


THREE PHASE & MULTIPLE MPPT

SE 100/110KTL-M3, SE 125KTL-MH3

Application: Large-Scale Industrial and Commercial Sites

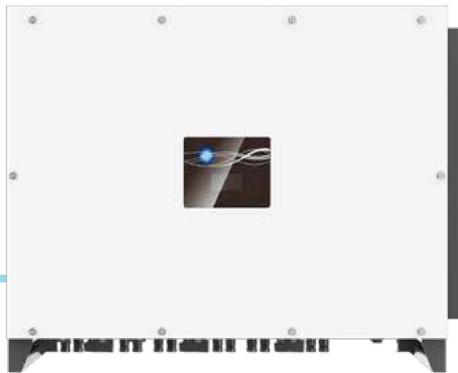

SUPERIOR EFFICIENCY

- Maximum efficiency of 98.8%
- Compatible with high power modules (500W/600W+)
- 150% PV configuration and 110% output overload



HIGH RELIABILITY

- IP66 waterproof and dustproof
- High quality components used
- Integrated type II DC/AC SPD, optional AFCI detection and C5 anti-corrosion



INTELLIGENT MAINTENANCE

- String level I/V detection (Optional)
- Remote configuration and upgrade
- Power export control supported

Model	SE 100KTL-M3	SE 110KTL-M3	SE 125KTL-MH3
Efficiency			
Max. Efficiency	98.5%	98.6%	98.8%
European Efficiency	98.0%	98.2%	98.4%
Input (PV)			
Max. Input Voltage		1100V	
Max. PV Configuration		150%	
Rated Input Voltage		620V	
Max. Input Current	3*40A+5*32A		3*40A+6*32A
Max. Short Circuit Current	3*50A+5*45A		3*50A+6*45A
Start Input Voltage/ Min. Operating Voltage		250V / 200V	
MPPT Operating Voltage Range		200V-1000V	
Max. Number of PV Strings	16 (8*2)		18 (9*2)
No. of MPPTs	8		9
Output (Grid)			
Rated AC Active Power	100,000W	110,000W	125,000W
Max. AC Apparent Power	110,000VA	121,000VA	137,500VA
Max. AC Active Power (PF=1)	110,000W	121,000W	137,500W
Max. AC Output Current	3*168.8A	3*187A	3*167.3A
Rated AC Voltage	400V, 3W+N+PE		480V, 3W+PE
AC Voltage Range*	277V-520V (Adjustable)	50Hz / 60Hz	300V-550V (Adjustable)
Rated Grid Frequency		45Hz-55Hz / 55Hz-65Hz (Adjustable)	
Grid Frequency Range**		<3% (Rated Power)	
THDI			
DC Current Injection		<0.5%In	
Power Factor		> 0.99 Rated power (Adjustable 0.8 LD - 0.8 LG)	
Protection			
DC Switch		Support	
Anti-Islanding Protection		Support	
AC Overcurrent Protection		Support	
AC Short Circuit Protection		Support	
DC Reverse Connection		Support	
Surge Arrester		DC Type II / AC Type II	
Insulation Detection		Support	
Leakage Current Protection		Support	
AFCI		Optional	
PID Recovery		Optional	
PV String Monitoring		Optional	
Night load Consumption Monitoring		Optional	
General			
Topology		Transformerless	
IP Rating		IP66	
Night Self Consumption		<10W	
Cooling		Fan cooling	
Operating Temperature Range		-25°C-60°C	
Relative Humidity Range		0-100%	
Max. Operating Altitude		4000m	
Noise		<75dB	
Dimensions (W*H*D)		850mm*670mm*356mm	
Weight		92Kg	
HMI & COM			
Display		Wireless & APP +LED, LCD (Optional)	
Communication		RS 485, Optional: WiFi / GPRS / 4G / LAN	
Certification			
Safety		IEC62109-1, IEC62109-2	
Grid Code	EN 50549-1/2, IEC 61727/62116, VDE-AR-N 4105, CEI 0-21/16, UNE 206006/206007-1, UNE 217001, AS 4777		
Warranty		5 Years	

Remarks: • The range of output voltage and frequency may vary depending on different grid codes.
• Specifications are subject to change without advanced notice.